Internorm
Windows – Doors

HT 410 TIMBER-ALUMINIUM-FRONT DOOR



CHARACTERISTICS

Thermal insulation (in W/m²K)
U_D up to 0,55

Sound reduction (in dB)
up to 34

Security
up to RC2

Locking
Multi-locking

Profile depth (in mm)
121







The design of this door is flush both inside and outside, making it perfectly suited to modern and unique architecture. The concealed door hinge is integrated as standard. Timber aluminium and highly insulating thermal foam insulation deliver an outstanding composite door solution. Standard 5-point locking provides maximum security.

TIMBER-ALUMINIUM-FRONT DOOR

HT 410

Cuts

Schnitt unten / Section - bottom

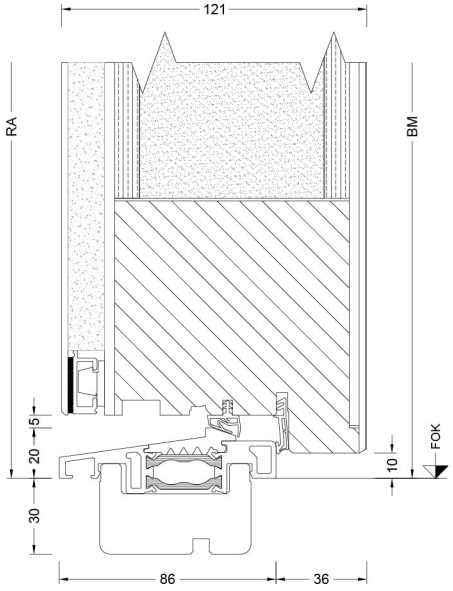

Schnitt seitlich, oben / Section - side top

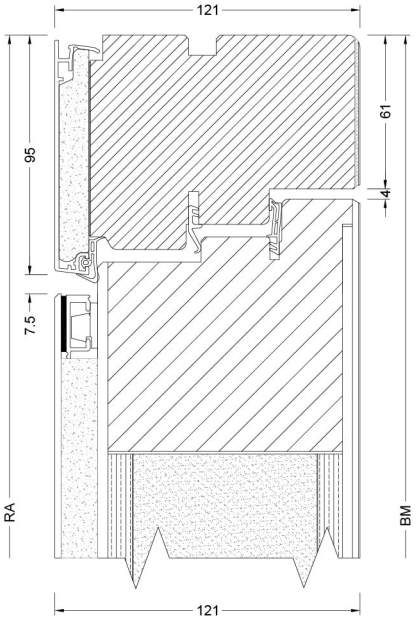

BM	Bestellmaß / Ordering size
FOK	Fußbodenoberkante / Finished floor level
GM	Glasmaß / Glass size
RA	Rahmenaußenmaß / Outside frame size
TM	Teilungsmaß / Division size

Internorm Windows UK Ltd
NW9 OHN London
Unit D, Colindale Business Park, 2-10 Carlisle Road
+44 (0) 20 820 599 91
office@internorm.co.uk